

# V46 Series Pressure Actuated Water Regulating Valve Catalog Page

## Description

The V46 is a pressure actuated modulating valve that is suitable for use either on closed or open systems. Direct acting valves open on pressure increase. This type of valve is primarily used to regulate the flow of water or glycol to a water cooled condenser on a refrigeration system.

Refer to the *V46 Pressure-Actuated Water-Regulating Valve Product Bulletin (LIT-125687)* for important product application information.

## Features

- no close fitting or sliding parts in water passages
- minimizes chatter or water hammer
- free movement of all parts provides smooth pressure modulation
- refrigerant adjustment is not affected by water pressure
- withstands high hydraulic shock without damage
- range spring does not come in contact with cooling water
- easy manual flushing, if required
- 3/8, 1/2, and 3/4 in. valves may be disassembled and reassembled without detaching from the refrigeration system or without pumping down

## Applications

This valve is designed to modulate flow of water or glycol to a water cooled condenser on a refrigeration system.

- ice machines
- ice cream machines
- computer room air conditioning units
- refrigeration cases



V46AA-1  
Water Regulating



V46AT-1 Water  
Regulating Valve

## Repair Information

If the V46 Series Pressure Actuated Water Regulating Valve fails to operate within its specifications, replace the unit. For a replacement valve, contact the nearest Johnson Controls® representative.

## ⚠ WARNING

This product is made of copper alloy, which contains lead. The product is therefore not to be used on drinking water.

## Selection Chart

Product Code Number <sup>1</sup>	Pipe Size (In.)	Inlet and Outlet	Opening Point Range – psig (kPa)	Pressure Element Style <sup>2</sup>	Seat Repair Kit	Replacement Power Elements
<b>Commercial Type, Standard Flow - Non-Corrosive Refrigerant</b>						
V46AA-1C	3/8 NPT	Threaded	70 to 260 (483 to 1,793)	30 in Capillary; 1/4 in. Flare Nut (Style 45)	STT14A-600R	SEP91A-600R and SEC99AA-36C <sup>3</sup>
V46AA-50C	1/2 NPT			1/4 in. External Flare Fitting (Style 5)		
V46AB-1C				30 in Capillary; 1/4 in. Flare Nut (Style 45)	STT16A-601R	SEP91A-601R and SEC99AA-36C <sup>3</sup>
V46AB-25C	1/4 in. External Flare Fitting (Style 5)			STT17A-609R		
V46AC-1C	3/4 NPT				30 in Capillary; 1/4 in. Flare Nut (Style 45)	STT17A-610R
V46AC-26C	1 NPT			1/4 in. External Flare Fitting (Style 5)	STT17A-610R	
V46AD-1C				30 in Capillary; 1/4 in. Flare Nut (Style 45)		STT15A-602R
V46AD-13C	1 1/4 NPT			1/4 in. External Flare Fitting (Style 5)	STT16A-601R	
V46AE-1C				30 in Capillary; 1/4 in. Flare Nut (Style 45)		STT17A-609R
V46AE-17C	1/4 in. External Flare Fitting (Style 5)			STT17A-610R	SEP91A-603R and SEC99AA-36C <sup>3</sup>	
V46AJ-2C	1/2	Union	48 in Capillary; 1/4 in. Flare Nut (Style 46)			STT18A-600R
V46EK-2C	3/4			STT18A-600R	SEP81A-601R	
V46AL-2C	1					STT18A-601R
V46AM-2C	1-1/4			STT18A-601R	SEP81A-601R	
V46AR-1C	1 1/2					Four Hole ASME Flange
V46AR-10C	2	70 to 170 (483 to 1,172)	STT18A-601R	SEP81A-602R		
V46AS-1C					160 to 260 (1,103 to 1,793)	
V46AS-2C	2	70 to 170 (483 to 1,172)	STT18A-601R	SEP81A-602R		
V46AT-1C	2-1/2				160 to 260 (1,103 to 1,793)	
V46AT-2C	2-1/2	(see Note below)	STT18A-601R	SEP81A-601R		

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products. © 2018 Johnson Controls. [www.penncontrols.com](http://www.penncontrols.com)



## V46 Series Pressure Actuated Water Regulating Valve Catalog Page (Continued)

Product Code Number <sup>1</sup>	Pipe Size (In.)	Inlet and Outlet	Opening Point Range – psig (kPa)	Pressure Element Style <sup>2</sup>	Seat Repair Kit	Replacement Power Elements	
<b>Commercial Type, Low Flow - Non-Corrosive Refrigerants<sup>4</sup></b>							
V46DA-2C	3/8 NPT	Threaded	70 to 260 (483 to 1,793)	30 in. Capillary; 1/4 in. Flare Nut (Style 45)	STT14A-603R	SEP91A-600R and SEC99AA-36C <sup>5</sup>	
<b>Commercial Type - Ammonia</b>							
V46AC-8C	3/4 NPT	Threaded	100 to 200 (690 to 1,379)	1/4 in. Internal NPT (Style 15)	STT16A-601R	SEP70A-601R	
V46AD-4C	1 NPT				STT17A-609R	SEP70A-604R	
V46AE-4C	1-1/4 NPT				STT17A-610R		
V46AR-2C	1-1/2	Four Hole ASME Flange			STT18A-600R	SEP70A-605R	
V46AS-3C	2				STT18A-601R		
V46AT-3C	2 1/2						
<b>Maritime Type - Non-Corrosive Refrigerants</b>							
V46BA-2C	3/8 NPT	Threaded	70 to 260 (483 to 1,793)	30 in. Capillary with Sweat Connection (Style 34)	STT14A-601R	SEP13A-602R	
V46BB-2C	1/2 NPT				STT15A-603R	SEP13A-600R	
V46BC-2C	3/4 NPT				STT17A-613R	SEP13A-603R	
V46BD-2C	1 NPT				STT17A-611R	SEP50A-600R	
V46BE-2C	1-1/4 NPT				STT17A-612R		
V46BS-4C	2	Four Hole ASME Flange	160 to 260 (1,103 to 1,793)		STT18A-602R	SEP50A-601R	
V46BT-4C	2-1/2						
<b>NAVSEA Certified – Non-Corrosive Refrigerants</b>							
V46CG-1C	3/8	Threaded	70 to 260 (483 to 1,793)	30 in. Capillary with Sweat Connection (Style 34)	STT14A-601R	SEP13A-602R	
V46CH-2C	3/8	Sweat Connector					
V46CH-4C	3/8						
V46CH-5C	3/8						
V46CJ-2C	1/2	Sweat Connector			STT15A-603R	SEP13A-600R	
V46CN-2C	3/4	Four Hole Navy Flange			STT17A-613R	SEP13A-603R	
V46CP-2C	1				STT17A-611R	SEP50A-600R	
V46CQ-2C	1-1/4				STT17A-612R		
V46BR-2C	1-1/2	Four Hole ASME Flange					
V46CR-2C	1-1/2	Six Hole Navy Flange					
V46BS-3C	2	Four Hole ASME Flange			70 to 170 (483 to 1,172)	STT18A-602R	SEP50A-601R
V46CS-3C	2				Six Hole Navy Flange		
V46CS-4C	2				160 to 260 (1,103 to 1,793)		
V46BT-3C	2-1/2	Four Hole ASME Flange			70 to 170 (483 to 1,172)		
V46CT-3C	2-1/2	Six Hole Navy Flange					
V46CT-4C	2-1/2		160 to 260 (1,103 to 1,793)				

1. Refer to *V46 Series Valve Sizing Information — 90% Open Method (LIT-1927400) Catalog Page (LIT-1927400)*. Then specify the code number from this chart. Refer to the *Accessories* chart on the following page for companion flange kit code numbers.
2. Standard capillary length on Style 45 and Style 34 elements is 30 inches
3. Replacement element supplied with 1/4 in. external SAE connector. Order SEC99AA Capillary Kit with 2 flare nuts separately, if needed.
4. Low water flow valve - 2.5 GPM max.
5. Replacement element supplied with 1/4 in. external SAE connector. Order SEC99AA Capillary Kit with 2 flare nuts separately, if needed.

**Note:** Use only on valves specified.




## V46 Series Pressure Actuated Water Regulating Valve Catalog Page (Continued)

### Accessories (Companion Flanges and Gaskets)

Product Code Number		Water Valve Size (in.)
Flange Gasket (One Gasket per Package)	Companion Flange Kit (See Diagram)	
246-423	KIT14A-612 <sup>1</sup>	1-1/2 in.
246-424	KIT14A-613 <sup>1</sup>	2 in.
246-425	KIT14A-614 <sup>1</sup>	2-1/2 in.

1. For commercial valves only

**Note:** Flange has NPT (National Pipe Thread)

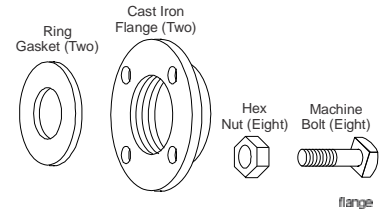

**Companion Flange Kit**

### Technical Specifications

V46 Series Pressure Actuated Water Regulating Valves		
Maximum Water Temperature	170°F (77°C)	
Valve Body	Commercial	3/8 to 3/4 in. cast brass, 1 in. and larger cast iron with a special finish
	Navy and Maritime	Cast naval bronze with Monel® interior parts

### Pressure Range Specification

Refrigerant	Opening Point Range <sup>1</sup> - psig (kPa) V46A B, C, D	Maximum Permissible Pressure psig (kPa)		Refrigerant
		Water		
		Static	ΔP Across Valve	
<b>Non-Corrosive Refrigerants (R12, R22, R134a, R502, R404a, R507)</b>				
All Range Valve	70 to 260 (483 to 1,793)	150 (1,034)	60 PST	320 (2,206)
All Range with High Overpressure				370 (2,551)
3/8 in. Extended All Range	70 to 300 (483 to 2,068)			440 (3,034)
<b>Valves 2 in. or Larger</b>				
R12, R134a - 2 and 2-1/2 in. Low Range	70 to 170 (483 to 1,172)	150 (1,034)	60 PST	230 (1,586)
R22, R502, R404a, R507 - 2 and 2-1/2 in. High Range	160 to 260 (1,103 to 1,793)			320 (2,206)
<b>Other Refrigerants</b>				
Ammonia R717	100 to 200 (690 to 1,379)	150 (1,034)	60 PST	320 (2,206)

1. Direct acting valve ranges indicate the valve opening point.